

FTTH Optibox series:

Shuttered FTTH Hybrid Faceplate (86x86)

Feature:

- Suitable for indoor FTTH network
- Mounts directly to electrical junction box (86x86mm) or wall
- 1 x ports for 2 fiber network adaptors
- 2 x ports for keystone jack or modular ports
- Modular ports available for fiber network adaptors (SC, ST, etc.) or AV system adaptors (RCA, Coaxial, HDMI, etc.)
- Multiple cable entrances through the base and sides
- Mechanical cable and mechanical splicer fixing system
- Bending radius control for fiber routing



Outside view

Modular ports:

For copper network:



Keystone Jack
RJ-45

For fiber network:




SC Adaptor
Module



ST Adaptor
Module

For AV systems:



S-VHS Female
Module



RCA
Module





BNC
Module

Modular code	System	Adaptor type
SC	Fiber	Simplex SC Adaptor
DLC	Fiber	Duplex LC Adaptor
MTRJ	Fiber	MTRJ Adaptor
RJ	Copper	CAT5E RJ-45 Keystone Jack
C6	Copper	CAT6 RJ-45 Keystone Jack
RCA	AV	RCA Adaptor
SV	AV	S-VHS(S-Video) Adaptor
BNC	AV	BNC Adaptor
NE		Dust Cover
HD	AV	HDMI Adaptor
*More modules is available upon request		

Specification:


Parameter	Value
No. of fiber adaptors port	1
No. of modular port	2
Connector type	SC, Duplex LC, RJ-45, HDMI, etc
Installation	Wall mount/ Back box (86x86) mount
Dimension	86(H)x 86 (W) x 27.8(D) mm
Weight	0.1 kg
Colour	White
Material	ABS (UL94 V-0)
Min. Bending radius	25mm

For different application:

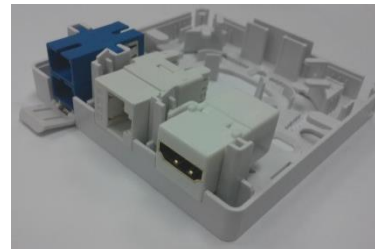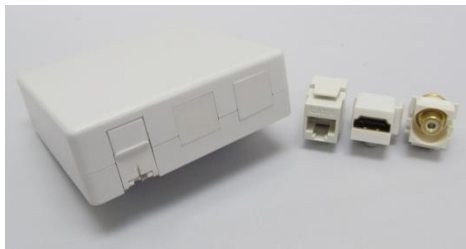

Ordering information:

Part number: **INF5133-Ax-Bx-Cx**



A, B, C: Modular code

X: Number of module



*These figures are nominal values.
*Infinite Cable System reserves the right to modify products and specifications without prior notice.